






















- 12th Generation Intel<sup>®</sup> Core<sup>™</sup> i7 / i5 vPro<sup>®</sup> Processor
- 11.6" FHD LumiBond® display with Getac sunlight readable technology (1,000 nits) and capacitive touchscreen
- Enhanced enterprise security with Intel<sup>®</sup> vPro<sup>®</sup>,
   Windows disk encryption, TPM 2.0 and many more multi-factor authentication options
- Versatile I/Os connectivity including Thunderbolt™ 4 and docking solutions
- ullet LifeSupport<sup>TM</sup> battery swappable technology



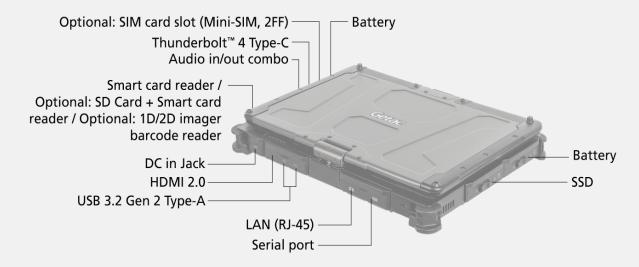

### **SPECIFICATIONS**

### Generation

# Operating System Windows 11 Pro

**Mobile Computing Platform** 

Intel® Core™ i5-1235U Processor Max. 4.4GHz with Intel® Turbo Boost Technology - 12MB Intel® Smart Cache

Platform options:

Intel® Core™ i5-1245U vPro® Processor Max. 4.4GHz with Intel® Turbo Boost Technology - 12MB Intel® Smart Cache

Intel<sup>®</sup> Core™ i7-1255U Processor Max. 4.7GHz with Intel® Turbo Boost Technology
- 12MB Intel® Smart Cache

Intel® Core™ i7-1265U vPro® Processor Max. 4.8GHz with Intel® Turbo Boost Technology - 12MB Intel® Smart Cache

### VGA Controller

Intel<sup>®</sup> Iris<sup>®</sup> X<sup>e</sup> Graphics

Display
11.6" Wide Viewing Angle TFT LCD FHD (1920 x 1080)
Protection film
1000 in Limitage display with Getac sunlight read 1,000 nits LumiBond® display with Getac sunlight readable technology Capacitive multi-touch screen

Storage & Memory 8GB DDR4

Optional: 16GB / 32GB / 64GB DDR4

256GB PCIe NVMe SSD Optional: 512GB / 1TB / 2TB PCIe NVMe SSD

Keyboard

LED backlit membrane keyboard Optional: Rubber keyboard Power button 5 tablet programmable buttons

**Pointing Device** 

Touchscreen - Capacitive multi-touch screen - Optional: Dual mode touchscreen (multi-touch and digitizer)

Touchpad - Glide touchpad with left-click and right-click buttons

### **Expansion Slots**

Smart card reader "
Optional: SD Card + Smart card reader "
Optional: 1D/2D imager barcode reader "

## I/O Interface

FHD webcam x 1 III Audio in/out combo x 1 Audio in/out combo x 1 DC in Jack x 1 Thunderbolt™ 4 Type-C x 1 USB 3.2 Gen 2 Type-A x 2 LAN (RJ45) x 1 HDMI 2.0 x 1

Serial port (9-pin; D-sub) x 1
Docking connector x 1
Optional: SIM card slot x 1 (Mini-SIM, 2FF) (Protein Simulation) (Protein Simulation) x 1 (front-facing) x 1 <sup>III</sup>
Optional: RF antenna pass-through for GPS, WWAN and

Optional: 8M pixels auto focus rear camera x 1

Communication Interface 10/100/1000 base-T Ethernet Intel® Wi-Fi 6E AX211, 802.11ax Bluetooth (v5.3)

Dual SIM

Optional: 4G LTE mobile broadband iv, xvii Optional: 5G Sub-6 iv

Optional: Discrete GPS vii

### **Security Features**

TPM 2.0

Kensington lock
Optional: Intel® vPro® Technology
Optional: Fingerprint reader
Optional: HF RFID reader viii

Smart card reader Optional: Windows Hello face-authentication camera

(front-facing)

AC adapter (65W, 100-240VAC, 50/60Hz) Li-ion battery (11.1V, typical 2100mAh; min. 2040mAh) x 2 LifeSupport™ battery swappable technology

Dimension (W x D x H) & Weight 313 x 238 x 39mm (12.32 " x 9.37 " x 1.53 ") 2.1kg (4.63lbs) <sup>kx</sup>

Rugged Features MIL-STD-810H certified IP65 certified IP65 certified MIL-STD-461G certified <sup>x</sup> Vibration & 4ft (1.2m) drop resistant <sup>xi</sup> Optional: ANS/UL 121201, CSA C22.2 NO. 213 (Class I, Division 2, Groups A, B, C, D) <sup>xii</sup> Optional: Salt fog certified

### **Environmental Specifications**

Temperature \*\*\*!: - Operating: -29°C to 63°C / -20°F to 145°F - Storage: -51°C to 71°C / -60°F to 160°F

95% RH, non-condensing

### Pre-installed Software

Pre-Installed Software Getac Utility Getac Camera Getac Geolocation Getac Barcode Manager \*\*\* Optional: Absolute Persistence

### **Optional Software**

Getac Driving Safety Utility Getac Device Monitoring System (GDMS)

Getac VGPS Utility \*

### Accessories

Accessories
Battery (11.1V, typical 2100mAh; min. 2040mAh)
AC adapter (65W, 100-240VAC)
Capacitive stylus with tether

### Optional:

Optional:
Carry bag
Battery (11.1V, typical 2100mAh; min. 2040mAh)
Multi-Bay charger (Dual-Bay)
Multi-Bay charger (Eight-Bay)
AC adapter (65W, 100-240VAC)
Office dock AC adapter (90W, 100-240VAC)
MIL-STD-461 AC adapter (90W, 100-240VAC)
DC-DC vehicle adapter (120W, 11-32VDC)
Digitizer pen
Capacitive stylus with tether
Protection film
Hard handle

Hard handle X strap Shoulder strap (2-point)

Vehicle cradle <sup>xvi</sup>
Vehicle dock <sup>xvi</sup>
Office dock
Spare SSD kit
100W Type-C adapter
Getac rugged keyboard

Bumper-to-Bumper Warranty
Accidents can take your equipment out of service when you least expect it, especially in a rugged environment, which can cause costly equipment downtime. That is why Getac has introduced accidental damage as standard under our Bumper-to-Bumper warranty, to help minimize your enterprise IT costs.
Bumper-to-Bumper is your hassle-free guarantee. That means you can depend on us to have your unit back in service within days.

### Standard

3 vears Bumper-to-Bumper

	Vehicle Dock	Office Dock
Serial Port	2	2
External VGA	1	1
Microphone	1	1
Audio Output	1	1
DC in Jack	1	1
USB	4	4
LAN	1	1
HDMI	1	1
RF Antenna Connector	3 (WWAN, WLAN, GPS)	-

# V110 FULLY **RUGGED NOTEBOOK**

Units equipped with dual channel memory come with Intel® Iris® X° Graphics.
Smart card reader, Optional SD card + Smart card reader, and Optional 1D/2D imager barcode reader are mutually exclusive.
FHD webcam and optional Windows Hello face—

FHD webcam and optional Windows Hello face-authentication camera (front-facing) are mutually exclusive options.
Units with 4G/SG LTE option come with an embedded SIM card slot.
Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area. physical SIM card slot and one eSIM. Network service may vary depending on local telecommunication providers.

providers. Support GPS and Glonass.

33BpDot Gr3 and Goldase. 13.56MHz contactless HF RFID/NFC reader (ISO 15693, 14443 A/B, Mifare and FeliCa™ compliant). Weight and dimensions vary from configurations

weight and unlenshors vary from comingulate and optional accessories. MIL-STD-461 90W AC adapter sold separately. Drop test results vary from configurations and optional accessories. Available with limited configurations and

XII. environment conditions

XIII.

Tested by an independent third-party test lab following MIL-STD-810H. Available when barcode reader option is selected. Models require either embedded or standalone GPS

Models
 Wolden and Havis vehicle docks are e-mark certified.

XVI. Support GPS, GLONASS, Galileo, and BeiDou.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.





15495 Sand Canyon Ave. Suite 350 Irvine, CA 92618 Tel : 949-681-2900 GetacSales\_US@getac.com I www.getac.com/us/
Copyright © 2023 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved. Information provided herewith is for reference only, available specification shall be subjected to quotation by request.