


ALFRED AD-215/156

21.5"/ 15.6" Interactive Kiosk



- Wi-Fi (Option)
- Windows or Android
- Latest Intel CPU/ ARM Rockchip RK3399
- 21.5" Anti Glare/ 15.6"
- 7H Hardness, Touch Glass, PCT
- 2D Barcode Scanner
- Space reserved for RFID reader or ADA keypad
- 3" Thermal Printer
- EMV Bracket (Option)
- Keylock

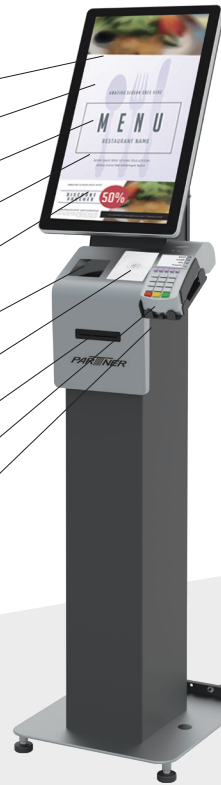

RETAIL & HOSPITALITY



FOOD & BEVERAGE SERVICE



HEALTHCARE



TRANSPORTATION



GOVERNMENT & CORPORATE



EVENTS & ENTERTAINMENT

SPECIAL FEATURES

- 21.5" or 15.6" LCD in Vertical or Horizontal position
- Efficient processor choices including Kaby Lake i3 and i5 CPU handle latest applications at blazing speed
- High speed M.2 SSD helps performance and reliability
- Thermal Printer, 2D Barcode Scanner, Locked printer prevents user interference
- Designed for maximum efficiency, longevity, flexibility & scalability to meet your business requirements

OPTIONS

- RFID Reader
- Wi-Fi
- Payment Bracket
- LED Status Light Bar

ALFRED WITH COVID-19 SOLUTION

UV-C light cleaning / Hand sanitizer dispenser



Partner Tech provides UV-C light cleaning solution and hand sanitizer auto-dispenser on self-checkout Kiosks to help restaurants, stores and theaters re-open safely after COVID19.

UV-C light cleaning is an effective and automatic cleaning technology that will keep touch screens safe for use and help decrease the spread of COVID-19.



- Automated and customizable disinfecting cycle.
- 99% effective in eradicating viruses, bacteria and mold.
- Motion activated for the safe deployment of the UV-C light.
- Helps eliminate the transfer of harmful pathogens while being safe to customers, staff and the community.

Partner Tech also provides auto temperature screening, anti-microbial coating, hand sanitizer dispenser and anti-bacteria touch screen overlay for store hygiene requirements.

ALFRED AD-215/156 (Windows)



CARE . TRUST . RESPONSIBILITY

Item	AD-215		AD-156	
Set up	Counter Top or Floor Stand			
Processor	Intel® Core™ i3-7100U	Intel® Celeron® J3455	Intel® Core™ i3-7100U	Intel® Celeron® J3455
	Intel® Core™ i5-7300U		Intel® Core™ i5-7300U	
Memory	DDR4 4GB to 16GB	DDR3L 4GB to 8GB	DDR4 4GB to 16GB	DDR3L 4GB to 8GB
Storage	M.2 PCIe Gen3.0 x2 SSD	M.2 SATA SSD	M.2 PCIe Gen3.0 x2 SSD	M.2 SATA SSD
	128G to 256G	128G to 256G	128G to 256G	128G to 256G
Operation System	Windows 10 IoT LTSC (64bit), Linux (Ubuntu)			
Screen Size	21.5"		15.6"	
Resolution	1920 x 1080		1366 x 768	
Screen Position	Vertical or Horizontal			
Touch Panel	PCAP, Multi-touch			
Audio	3W speaker			
WiFi (option)	2.4GHz/5GHz (IEEE 802.11a/b/g/n/ac)			
BT (option)	BT 4.2 (supports BLE)			
Adaptor	12V, 120W/100~240V		12V, 90W/100~240V	
I/O Interface				
USB	4 x USB 3.0 (USB3.0/2.0)			
COM	2 x RJ45 serial ports, 0V/5V/12V selection under BIOS (COM1, COM2)			
Ethernet	2 x LAN IEEE 802.3 10/100/1000 Mbps			
RJ11	1 x RJ11 port supports 2 cash drawers with 24V / 12V by jumper setting			
Audio	1 x Audio (1 x Line-out)			
HDMI	1 x HDMI			
VGA	1 x VGA			
Environment				
Operation Temperature	5~40°C			
Storage Temperature	-20°C to +60°C			
Operation Humidity	15 to 85% without condensation			
Storage Humidity	15 to 85% without condensation			
Peripherals				
Bar Code Scanner	Reads 1D and 2D bar codes			
Printer	3" Thermal Printer: RP-700 (default)			
	Options: Epson TM-70, Star mC-Print2			
Optional Accessories				
EMV Terminal Bracket	Ingenico IPP-320, LANE3000, IUC-285			
	Verifone VX850A			
	PAX 300			
Camera	5MP			
RFID Reader	13.56MHz			
Keypad	Assistive, audio enabled keypad offering menu navigation			
Wheel Kit	Four wheels & one handle			

*Specification is subject to change without prior notice

ALFRED AD-215/156(ARM)



CARE . TRUST . RESPONSIBILITY

Item	AD-215	AD-156
Set up	Counter Top or Floor Stand	
Processor	ARM RK3399	
Memory	4GB LDDR4 on board	
Storage	32GB eMMC + 1 x Micro SD card slot supports up to 256GB	
OS	Android 9.0	
Screen Size	21.5"	15.6"
Resolution	1920 x 1080	1366 x 768
Screen Position	Vertical or Horizontal	
Touch Panel	PCAP, Multi-touch	
Audio	3W speaker	
WiFi (option)	2.4GHz/5GHz (IEEE 802.11a/b/g/n/ac)	
BT (option)	BT 4.2 (supports BLE)	
Adaptor	12V, 65W/100~240V	
I/O Interface		
USB	1 x USB3.0 (OTG) 5 x USB2.0	
COM	2 x RJ45 serial ports, 0V/5V/12V selection by jumper setting	
Ethernet	1 x LAN IEEE 802.3 10/100/1000 Mbps	
RJ11	1 x RJ11 port supports 2 cash drawers with 24V / 12V by jumper setting	
Audio	1 x Audio (Line-out)	
HDMI	1 x HDMI	
Environment		
Operation Temperature	5~40°C	
Storage Temperature	-20°C to +60°C	
Operation Humidity	15 to 85% without condensation	
Storage Humidity	15 to 85% without condensation	
Peripherals		
Bar Code Scanner	Reads 1D and 2D bar codes	
Printer	3" Thermal Printer: RP-700 (default) Options: Epson TM-70, Star mC-Print2	
Optional Accessories		
EMV Terminal Bracket	Ingenico IPP-320, LANE3000, IUC-285 Verifone VX850A PAX 300	
Camera	5MP	
RFID Reader	NRF 13.56MHz	
Keypad	Assistive, audio enabled keypad offering menu navigation	
Wheel Kit	Four wheels & one handle	

*Specification is subject to change without prior notice

PARTNER TECH USA
15320 Barrance Parkway Suite 150.
Irvine, CA 92618
Phone: +1-949-598-1888
sales@partnertechcorp.com